



# ARICELL SCL-10

Bobbin Construction Size A

**Scope:** This data sheet describes the mechanical design and electrical performance of the AriCell SCL-10, A-size, 3.6V, 3.6Ah, Primary Lithium Thionyl chloride (SOCl<sub>2</sub>), HIGH ENERGY battery.

### Characteristics:

Nominal voltage: 3.6V


Nominal capacity: 3.6Ah (@ 1.19kΩ / 3mA at 25°C, cut-off voltage 2V)

Maximum recommended continuous current: 70mA

Maximum recommended pulse current: 160mA




Operating temperature range: -55°C to +85°C

Nominal weight: 24g

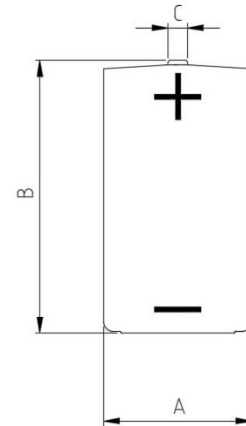

units=mm

	A	B	C
SCL-10	Max.16.8	Max.50.3	Ø 4.3

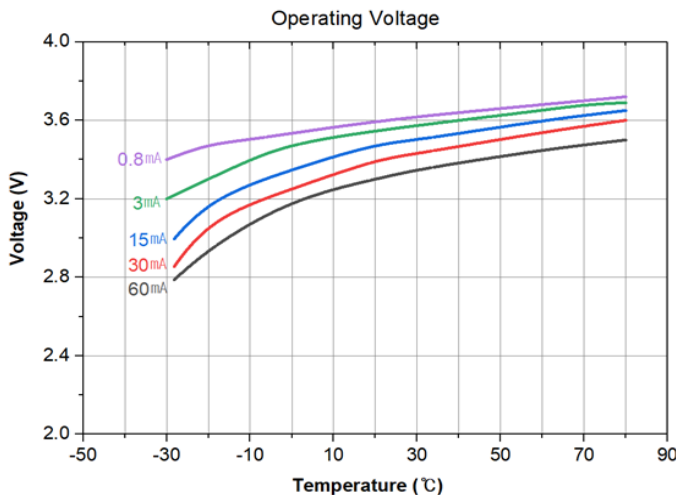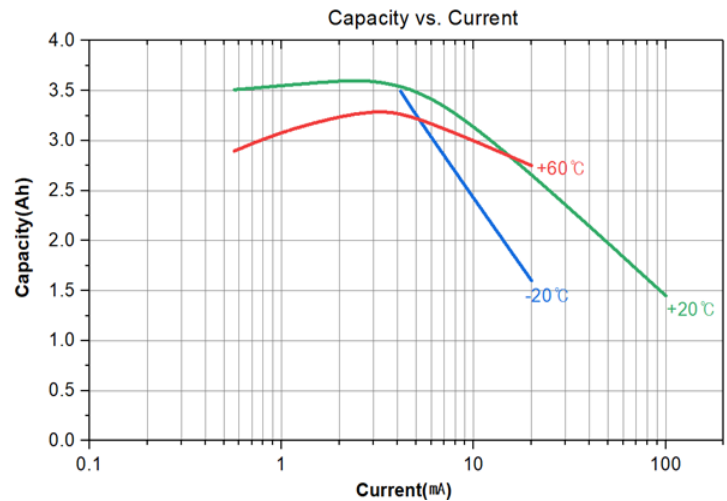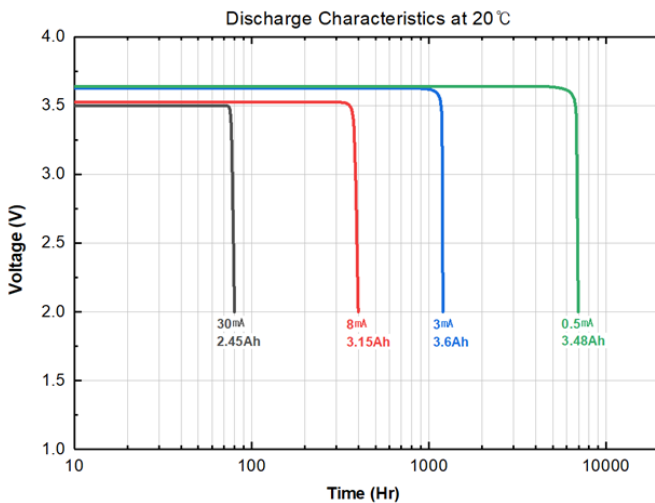

### WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Manufactured for, and distributed by:  
Devon Company

680 Main Street, Ste. 206 Watertown, CT 06795

Phone: (860)945-1177 Fax: (860)274-5381

Email: [info@devon-company.com](mailto:info@devon-company.com)

[www.devon-company.com](http://www.devon-company.com)