

Setup Instructions for DIY 1 Kit for Alerts and Notifications



Step 1. Activate device

Insert 3 AAA batteries. Press the TEST button and hold it for 2 seconds. When you see a steady blue led proceed to next step.

5


Step 2. Connect device to WiFi

Open your phone, go to Settings, and choose Wi-Fi. Under the CHOOSE A NETWORK tab you will see available networks. One of them will be the MySpool Device. It will look like SASensor-000000 where "000000" is the unique device ID. In the example it is shown as SASensor-2336877. Click on it.

Once connection is established, which may take a few seconds, it will open a browser window with Alerts WiFi Manager.

2


Step 2, cont'd. Connect to WiFi

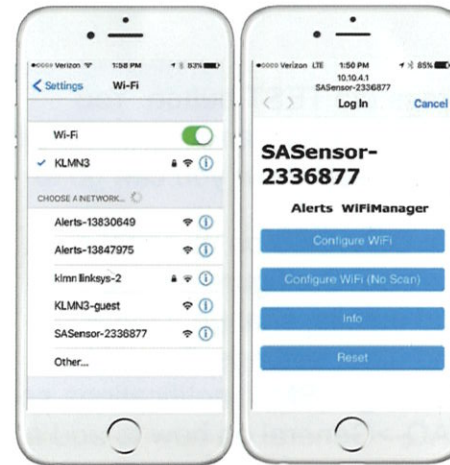

Click Configure WiFi. You will see a list of networks that MySpool device can use. Select your WiFi router and enter its password. Click Save.

3

Step 2, cont'd. Connect to WiFi

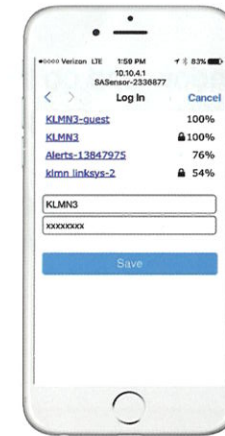

When you click Save and your device completes testing and saves WiFi network and password, its SASensor network ID will not be visible anymore!

For instructions on how to clear it and connect to a different WiFi, see Notes on page 8.

4

Step 3. Create your account and set up text and email notifications.

Open a browser window and go to <http://myspool.com> Use **AM733** as your Registration Code to create your account if you do not have one yet (look for email from myspool.com and click on the sent link to confirm it) OR *login to your existing account.*

Open your email, find one from AWS Notification and click on the link provided to **confirm** your email subscription to receive alerts.

Step 3, contd. Create MySpool account for all your devices.

Press the TEST button. You should receive an Alert via email notification. Now you can go to

MY DEVICES on myspool.com, click on **Configure Device** and add emails, change message and other settings. To add text message (SMS) notifications see **FAQ->General** on how to add a telephone number.

If you need assistance, send an email with your phone number to support@myspool.com

6

Notes

Please see up-to-date information under FAQ section on <http://myspool.com>

Always login to <http://myspool.com> using your user id, not your email.

Every new email address added needs to be **confirmed**.

The included cable with a white connector can be used instead of the TEST button. Shorting the pins on it is the same as pushing the button.

7

To clear the device and program a new WiFi network:

press and hold the CLEAR button while pressing the TEST button for 2 seconds. When you see a steady blue led the device has been erased and can be programmed with a new WiFi network. Proceed to Step 2.

8